



NOTES:

- \*1. RECOMMENDED DOOR CUT-OUT  
4 -  $\frac{3}{8}$ " HIGH x 4 -  $\frac{5}{8}$ " WIDE
- 2. DIMENSIONAL TOLERANCES  
 $\pm .030$

REVISIONS


LTR	DESCRIPTION	DATE	CHECKED
A	TURNED CUP 90°	9-11-91	US
B	REVISED	6-16-94	US
C	REVISED TA.	11-11-94	<i>eld</i>

\*BECAUSE THE WELDING ON EACH CORNER & THE SILICONE BETWEEN THE CUP AND THE FACE

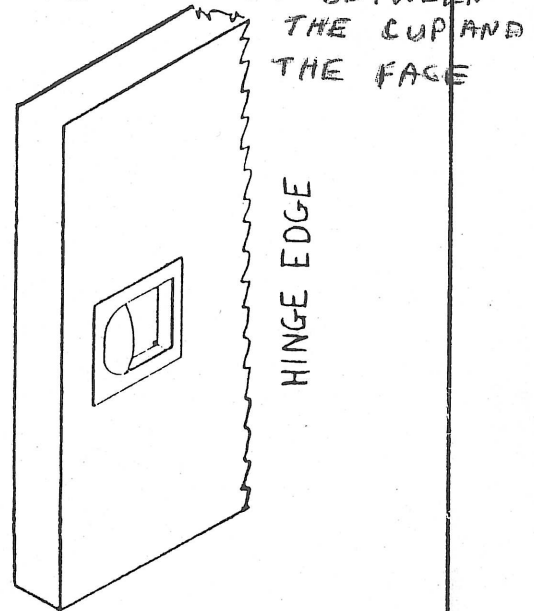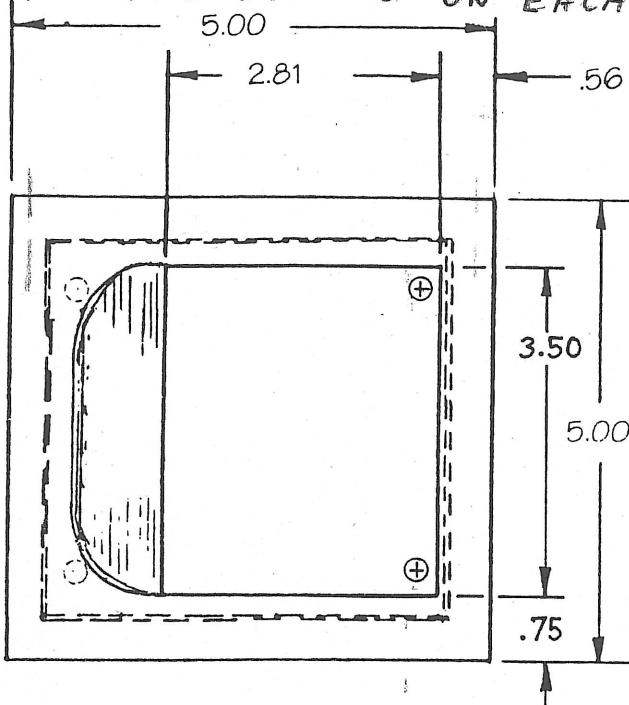

SUPPLIED WITH; 4 - #8 - 32 X  $\frac{3}{4}$ " PHILLIPS HEAD, OVAL HEAD MACHINE SCREWS, 4 - #8 FINISH WASHERS & 4 #8-32 SEX NUTS FOR 1.75 DOOR THICKNESS.

RECOMMENDED ORIENTATION UNLESS SPECIFIED OTHERWISE

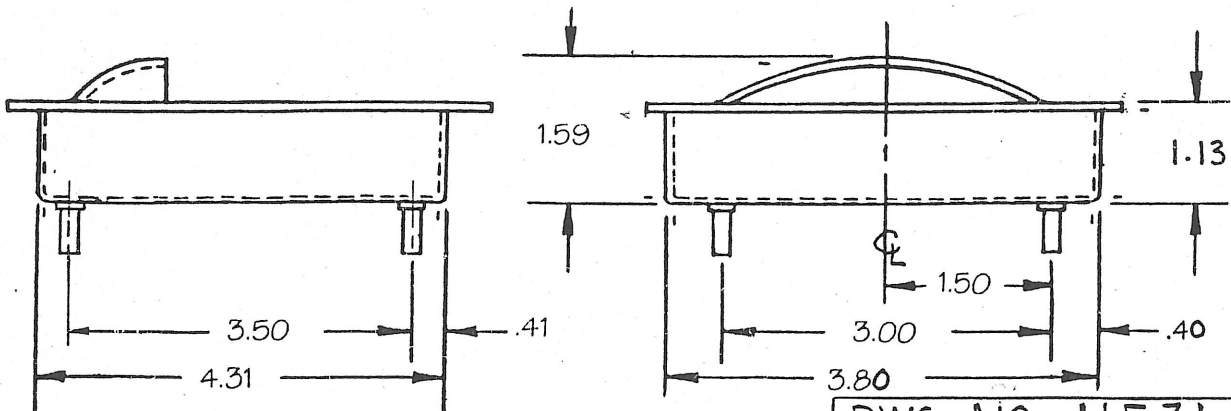

DWG. NO 11531

**Trimco / BBW**  
Triangle Brass Manufacturing Company, Inc.  
3528 Emery Street, P.O. Box 23277  
Los Angeles, CA 90023, USA

SCALE: HALF SCALE

FLUSH PULL  
1111 A

DRAWN BY: LAR 1-22-91

Book No. \_\_\_ Date Requested: \_\_\_  
This template is provided for use only on the job for which it was requested. Trimco reserves the right to make design changes without notice.

001102