


AP531  
Anodized Grip Ladder Pull  
Square End



**End Options:**

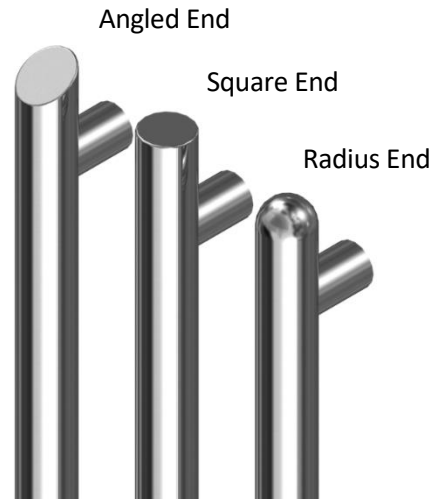

**ABOUT THE AP500 SERIES**

Trimco's AP500 Series Anodized Grip Ladder Pulls add style and sophistication to any opening. A multitude of options enable customization flexibility to enhance surrounding building aesthetics. Options include square, radius, and angled ends, as well as offset or straight posts, overall lengths from 12" up to 60".

**FEATURES**

- Ends and posts are manufactured from stainless steel, bronze, brass for long lasting durability
- Flexibility in design from straight or offset pulls to square, radius, or angled ends
- Wide range of lengths available from 12" to 60"
- Durable and aesthetically appealing black anodized finished grip
- Multiple mounting options for metal, wood and glass doors
- ADA Compliant

**APPLICATIONS**

- Retail & Strip Malls
- Hospitality
- Commercial & Industrial
- Multifamily & Mixed-Use

## How to Specify and Order:

Family	Description	Mounting Type	Size OA/CTC		Door Thickness	Options	Finish
			Overall	CTC			
<b>1" Diameter</b>		E • Thru-Bolt & Finish Washer G • Back-to-Back: Threaded Shoulder Bolt & Set Screws J • Concealed: Threaded Shoulder Bolt & Set Screws * L • Back-to-Back Concealed: Spanner Turning Washer & Stud * M • Concealed: Spanner Turning Washer & Stud N • Thru-Bolt with Flow-Thru Button	12 • 12" 8 • 8" 14 • 14" 10 • 10" 16 • 16" 12 • 12" 18 • 18" 14 • 14" 24 • 24" 18 • 18" 36 • 36" 30 • 30" 48 • 48" 42 • 42" 60 • 60" 54 • 54"	0 • Custom ** 1 • 3/8" ** ** 2 • 1/2" ** 3 • 1-3/8" 4 • 1-3/4" 5 • 2" 6 • 2-1/4" 7 • 2-1/2" 8 • 3"	Mid-Post P • Mid-Post Recommended for Pulls > 84" OA <b>Handing</b> R • Right L • Left Handing Only Required for Offset Pulls with Angled Ends - AP516, AP526 & AP536	605 • Polished Brass 606 • Satin Brass 609 • Antique Brass 612 • Satin Bronze 613 • Oil Rubbed Bronze 613E • Oil Rubbed Bronze (equivalent) 622 • Matte Black 628 • Satin Anodized Aluminum 629 • Polished Stainless Steel 630 • Satin Stainless Steel 316S • 316 Satin Stainless Steel 316P • 316 Polished Stainless Steel	
<b>1-1/4" Diameter</b>			Or Specify OA/CTC				
<b>1-1/2" Diameter</b>			Or Specify OA/CTC				
<b>Example</b>							
AP512L-6090-4.630		L	- 60	90	- 4	- P	630
AP513N-1814-4.629		N	- 18	14	- 4		629

## Notes

- Standard CTC (based on OA): Shorter than 24" is OA less 4" and greater than 24" OA less 6"
- Mid-post is recommended for CTC's of 84" or greater
- Engraving includes standard black infill
- Handing only required for Offset Pulls with Angled Ends
- Specifying Custom Pull Sizes (CTC) –
  - Example 1 • 35" OA, 29" CTC, specify as 3529
  - Example 2 • 11" OA, 7" CTC, specify as 1107
- \* For J & M mounting options, specify Riv-Nut for metal doors or bushings for wood doors if required
- \*\* Glass Door Mounting options for 3/8" & 1/2" door thicknesses require a W-Mount hardware kit